



ICE 0806 Series Cube ICE Maker

- ✓ Produces up to 1094 lbs. (497 Kgs.)* of ICE per day
- ✓ Constructed from sturdy, corrosion-resistant 300 series stainless steel
- ✓ Ultra-low profile - 26 inches (660 mm) tall
- ✓ Available with an air-, water- or remote-cooled condenser



ICE 0806 on a B55 Bin

***ICE-O-Matic® is the Best ICE Making Solution for:
Hard Water, Food Safety and Tight Spaces***

Problem

Food Safety

Food safety concerns about slime- and odor-causing bacteria

Hard Water

Scaling due to hard water slows Ice production

Tight-Fitting Spaces

Inadequate air flow due to tight-fitting spaces reduces Ice production

Corrosion

Salt air corrosion of outdoor equipment located in coastal regions

Solution

PURE ICE™ - Exclusively by ICE-O-Matic®

Built-in antimicrobial protection for the life of the machine prevents bacteria and slime fungus growth. ICE-O-Matic's® optional water filtration system provides protection against unpleasant tastes, odors and scale formation.

Harvest Assist

Consistent ICE production 24/7 by pushing the ICE into the bin rather than waiting for gravity to overpower the scale

Maximum ICE

Maximum ICE production in a minimum amount of space with an ultra-low profile - 30 inches wide / 26 inches tall

Sea Salt Corrosion Protection

All remote condensers are coated with a salt air corrosion protection – FREE

*Rated at 70 ° (21°) Air/50° (10°) Water

Dimensions and Air Flow

Air in-rear of icemaker

24" (610 mm)

30" (762 mm)




Air Out - (side discharge)

26" (660 mm)

76" (1930 mm)

31" (787 mm)

The diagram shows a front view of the ice maker. It is a two-part unit with a top section and a bottom section. The top section has a dark front panel with a small label that reads "1000 Series". The bottom section has a light-colored front panel with a larger label that reads "1000 Series". The unit is supported by four legs. Arrows indicate air flow: one arrow points from the rear of the top section, and another points from the side of the top section. Dimensions are given in inches and millimeters. The top section is 24 inches (610 mm) wide and 30 inches (762 mm) deep. The bottom section is 31 inches (787 mm) wide. The total height of the unit is 76 inches (1930 mm). The height of the top section is 26 inches (660 mm).

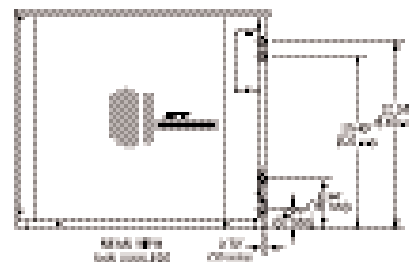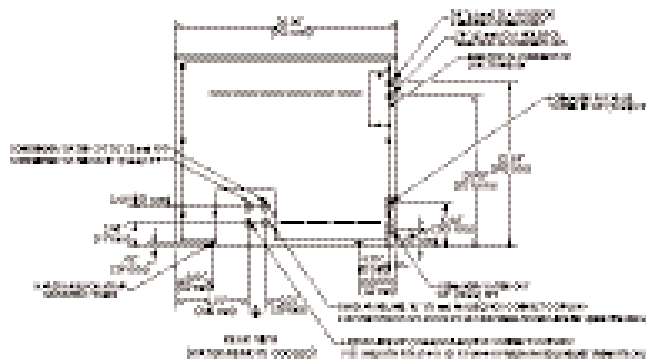

Half Cube $7/8" \times 7/8" \times 3/8"$ (22mm x 22mm x 10mm) Full Cube $7/8" \times 7/8" \times 7/8"$ (22mm x 22mm x 22mm)

ICE 0806					ICE 0805			
Conds. Unit	Air Temp. °F (°C)	Water Temp. °F (°C)			Air Temp. °F (°C)	Water Temp. °F (°C)		
		80°(27°)	70°(21°)	50°(10°)		80°(27°)	70°(21°)	50°(10°)
Air Cooled	90° (32°)	649 (295)	698 (317)	802 (365)	90° (32°)	572 (260)	615 (280)	728 (331)
	80° (27°)	744 (338)	800 (364)	880 (400)	80° (27°)	687 (312)	738 (336)	812 (369)
	70° (21°)	810 (368)	871 (396)	958 (435)	70° (21°)	758 (345)	815 (371)	897 (408)
Water Cooled	90° (32°)	781 (355)	840 (382)	903 (411)	90° (32°)	795 (361)	855 (389)	933 (424)
	80° (27°)	804 (365)	864 (393)	951 (432)	80° (27°)	839 (381)	902 (410)	992 (451)
	70° (21°)	844 (383)	907 (412)	998 (454)	70° (21°)	888 (404)	955 (434)	1051 (478)
Remote Cooled	90° (32°)	709 (322)	762 (346)	895 (407)	90° (32°)	686 (312)	738 (335)	851 (387)
	80° (27°)	841 (382)	904 (411)	994 (452)	80° (27°)	791 (359)	850 (386)	935 (425)
	70° (21°)	925 (420)	994 (452)	1094 (497)	70° (21°)	862 (392)	927 (421)	1020 (464)
	50° (10°)	1116 (507)			50° (10°)	1040 (473)		
	30° (-1°)	1138 (517)			30° (-1°)	1061 (482)		
	0° (-18°)	1161 (528)			0° (-18°)	1082 (492)		

1. 90°/70° figures are rated in accordance with ARI Standard 810. All remaining points are mathematical estimates.
2. All specifications and performance data are subject to normal manufacturing variances.

ORDERING AND SPECIFICATION INFORMATION

	Model No.	Cond. Unit	Ice Production per 24 hrs. at 70° Air/50° Water lbs. (Kgs.)	Ice Production per 24 hrs. at 90° Air/70° Water lbs. (Kgs.)	Water Used-Gals. (Lits.) per 100 lbs. of Ice 90° Air/70° Water		Kilowatts Used per 100 lbs. of Ice 90° Air 70° Water	Btuh	Voltage Characteristics	No. of Wires	Min. Circuit Amp.	Max. Fuse Size	Shipping Weight lbs. (Kgs.)
60 Hz	ICE0806•A	Air	958 (435)	698 (317)	21.8 (83)	n/a	6.2	15003	208-230/60/1	3	13.0	20	220 (100)
	ICE0806•W	Water	998 (454)	840 (382)	22.8 (86)	126.3 (478)	3.9	14458	208-230/60/1	3	9.8	20	210 (96)
	ICE0806•R	Remote	1094 (497)	762 (346)	22.5 (85)	n/a	5.4	15168	208-230/60/1	3	12.3	20	220 (100)
50 Hz	ICE0805•A	Air	897 (408)	615 (280)	21.7 (82)	n/a	6.3	13321	230/50/1	3	12.0	15	220 (100)
	ICE0805•W	Water	1051 (478)	855 (389)	23.2 (88)	131.4 (497)	3.7	14382	230/50/1	3	9.2	15	210 (96)
	ICE0805•R	Remote	1020 (464)	738 (335)	22.0 (83)	n/a	5.2	14474	230/50/1	3	13.0	15	220 (100)
ERC-2061		Remote Condenser for 1 model ICE0800R (208-230/50-60/1 voltage)											95 (43)
ERC-2062		Remote Condenser for 1 or 2 model ICE0800R (208-230/50-60/1 voltage)											125 (57)
RT-325-404		25 ft. (7.6m) Precharged Tubing Kit for R-404A models											13 (6)
RT-340-404		40 ft. (12m) Precharged Tubing Kit for R-404A models											18 (8)
RT-345-404		45 ft. (13.7m) Precharged Tubing Kit for R-404A models											19 (9)
RT-360-404		60 ft. (18.2m) Precharged Tubing Kit for R-404A models											26 (12)

See Bin specification sheet for information on ice storage bins

- represents cube size. For full cube substitute an "F", for half cube substitute an "H". Please note: air-cooled units require 6" (152 mm) clearance for air intake and exhaust.



We reserve the right to make changes in design and construction at any time without obligation.
©Mile High Equipment Company Rev Code: 1010A-03/03-SS

ICE-O-Matic/Mile High 11100 E. 45th Avenue, Denver, CO 80239
Tel. 303 371-3737 Fax. 303 371-6296 www.iceomatic.com

ICE o-Matic®