

- ✓ Produces up to 400 lbs. (182 Kgs.)* of ICE per day
- ✓ Self-contained insulated storage available in 143 lbs. (65 Kgs.) or 213 lbs. (97 Kgs.)
- ✓ Constructed from sturdy, corrosion-resistant 300 series stainless steel
- ✓ Ultra-low profile - 41 inches (1041 mm) tall
- ✓ Available with an air-cooled condenser



ICE-O-Matic® is the Best ICE Making Solution for: Hard Water, Food Safety and Tight Spaces

Problem

Optimal Bin Storage

Bin not large enough?

Tight-Fitting Spaces

Kitchen space utilization

Operating Environments

Built to last?

Dirty Air Filter

Forget to change the air filter?

Solution

Multiple Solutions

Storage of 143 pounds or 213 pounds of flaked ICE

Maximum ICE

Maximum ICE production in a minimum amount of space with an ultra-low profile:

- 41 inches tall
- Air intake only on one side
- Choice of 32 or 38 inches wide

ICE-O-Matic® Tough







Constructed with a brass evaporator and rugged stainless steel transport system enclosed in polyurethane insulation

Filter-Free Air

No air filter to change

EF 250 Series Flake ICE Maker Self-Contained

Dimensions and Air Flow

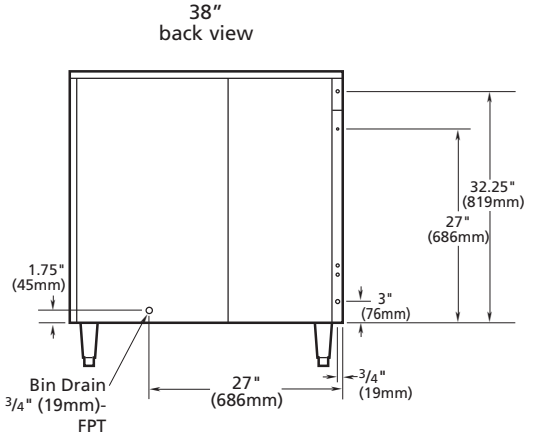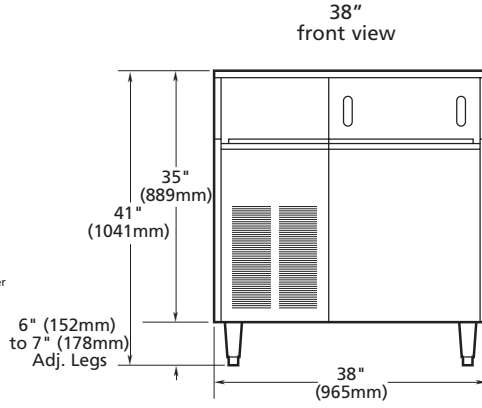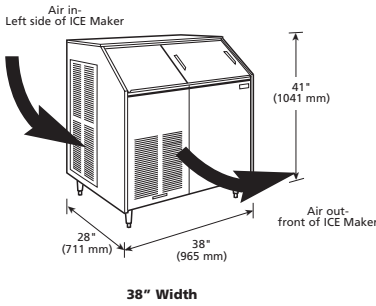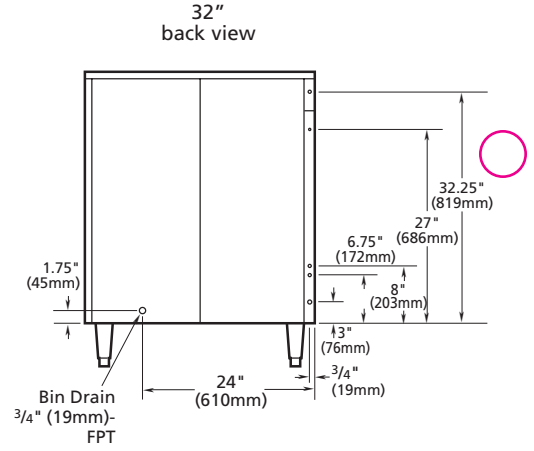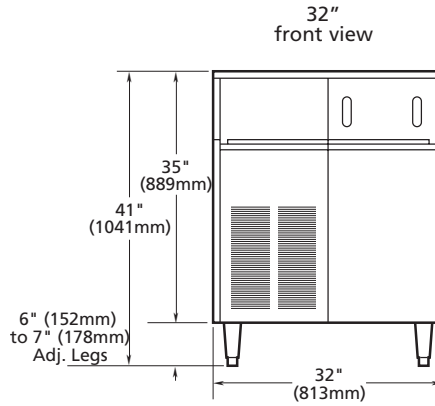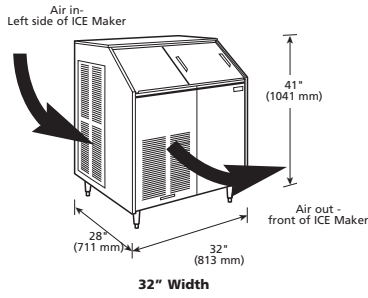

ICE PRODUCTION CHART POUNDS (KILOGRAMS) PER 24 HOURS

EF 250


Conds. Unit	Air Temp. °F (°C)	Water Temp. °F (°C)		
		80°(27°)	70°(21°)	50°(10°)
Air Cooled	90° (32°)	297 (135)	319 (145)	351 (160)
	80° (27°)	318 (144)	342 (155)	376 (171)
	70° (21°)	338 (154)	364 (165)	400 (182)

All specifications and performance data are subject to normal manufacturing variances.

OPERATING LIMITS

Ambient Temp. Range	50° - 110°F (10° - 43°C)
Air & Water	50° - 110°F (10° - 43°C)
Water Temp. Range	40° - 100°F (4.5° - 38°C)
Water Pressure Ice Maker	Min. 20 psi (1.4 bar)
Water in	Max. 60 psi (6.9 bar)


32", 38" side view

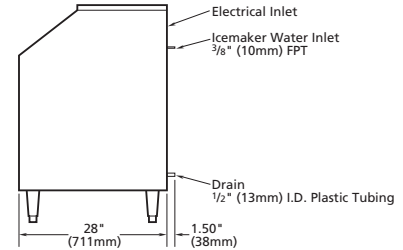

ORDERING AND SPECIFICATION INFORMATION

Model No.	Cab Size Width" (mm)	Bin Storage Lbs. (Kgs.)	Cond. Unit	ICE Production per 24 hrs. at 70° Air/50° Water lbs. (Kgs.)	ICE Production per 24 hrs. at 90° Air/70° Water lbs. (Kgs.)	Water Used-Gals. (Lits.) per 100 lbs. of Ice 90° Air/70° Water		Kilowatts Used per 100 lbs. of Ice 90° Air 70° Water	Btuh	Voltage Characteristics	Min. No. of Wires	Max. Circuit Amp.	Shipping Fuse Size	Weight lbs. (Kgs.)
						ICE Prod. Use	Cond. Use							
EF250A32S	32 (813)	143 (65)	Air	400 (182)	319 (145)	12.0 (45)	n/a	5.6	4233	115/60/1	3	12.4	15	240 (109)
EF250A38S	38 (965)	213 (97)	Air	400 (182)	319 (145)	12.0 (45)	n/a	5.6	4233	115/60/1	3	12.4	15	250 (114)

Please note: air-cooled units require 6" (152 mm) clearance for air intake and exhaust.



We reserve the right to make changes in design and construction at any time without obligation.
2003 © ICE-O-Matic Rev Code: 2000A-06/03-55

ICE o-Matic®

ICE-O-Matic 11100 E. 45th Avenue, Denver, CO 80239
Tel. 303 371-3737 Fax. 303 371-6296 www.iceomatic.com