

- ✓ Produces up to 722 lbs. (351 Kgs.)\* of ICE per day
- ✓ Self-contained insulated storage available in 143 lbs. (65 Kgs.), 213 lbs. (97 Kgs.) or 315 lbs. (143 Kgs.)
- ✓ Constructed from sturdy, corrosion-resistant 300 series stainless steel
- ✓ Ultra-low profile - 41 inches (1041 mm) tall
- ✓ Available with an air-cooled condenser



***ICE-O-Matic® is the Best ICE Making Solution for:  
Hard Water, Food Safety and Tight Spaces***

## ***Problem***

### **Optimal Bin Storage**

Bin not large enough?

### **Tight-Fitting Spaces**

Kitchen space utilization

### **Operating Environments**

Built to last?

### **Dirty Air Filter**

Forget to change the air filter?

## ***Solution***

### **Multiple Solutions**

Storage of 143 pounds, 213 pounds or 315 pounds of flaked ICE

### **Maximum ICE**

Maximum ICE production in a minimum amount of space with an ultra-low profile:

- 41 inches tall
- Air intake only on one side
- Choice of 32, 38 or 48 inches wide

### **ICE-O-Matic® Tough**


Constructed with a brass evaporator and rugged stainless steel transport system enclosed in polyurethane insulation

### **Filter-Free Air**

No air filter to change


# EF800 Series Flake ICE Maker Self-Contained

## Dimensions and Air Flow


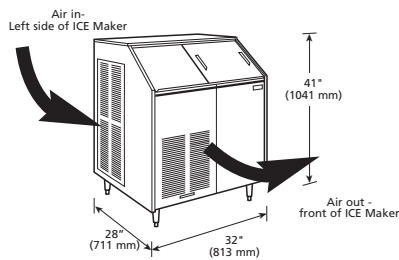


32" Width

32" front view




32" back view

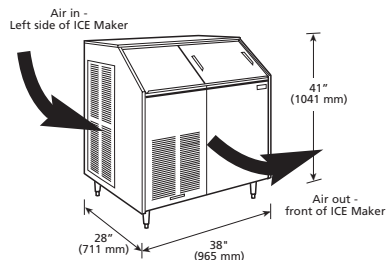



38" Width

38" front view

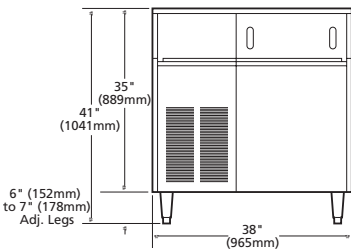


38" back view

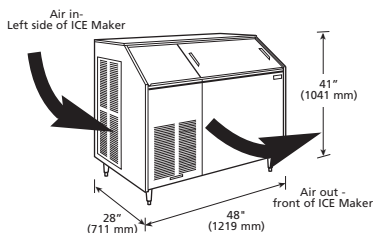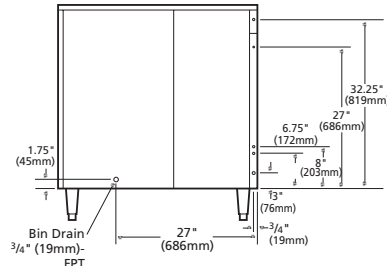


48" Width

48" front view

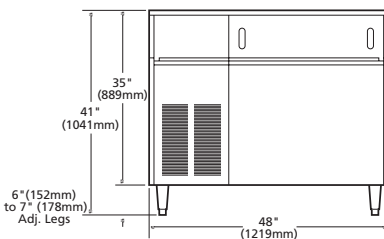

48" back view

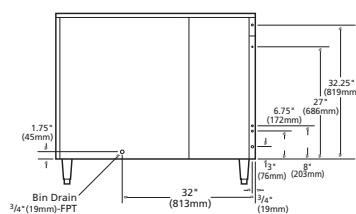

## ICE PRODUCTION CHART POUNDS (KILOGRAMS) PER 24 HOURS


		EF 800		
Conds. Unit	Air Temp. °F (°C)	Water Temp. °F 80°(27°)	Water Temp. °F 70°(21°)	Water Temp. °F 50°(10°)
Air Cooled	90° (32°)	573 (260)	<b>616 (280)</b>	678 (308)
	80° (27°)	613 (279)	659 (300)	725 (330)
	70° (21°)	653 (297)	702 (319)	<b>772 (351)</b>

All specifications and performance data are subject to normal manufacturing variances.

## OPERATING LIMITS

Ambient Temp. Range	50° - 110°F (10° - 43°C)
Air & Water	50° - 110°F (10° - 43°C)
Water Temp. Range	40° - 100°F (4.5° - 38°C)
Water Pressure Ice Maker	Min. 20 psi (1.4 bar)
Water in	Max. 60 psi (6.9 bar)
Condenser Inlet Water (Water cooled only)	Min. 20 psi (1.4 bar)
	Max. 60 psi (6.9 bar)

32", 38", 48" side view

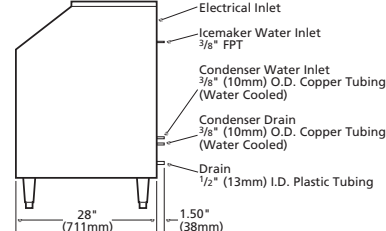


## ORDERING AND SPECIFICATION INFORMATION

Model No.	Cab Size Width (mm)	Bin Storage Lbs. (Kgs.)	Cond. Unit	ICE Production per 24 hrs. at 70° Air/50° Water lbs. (Kgs.)	ICE Production per 24 hrs. at 90° Air/70° Water lbs. (Kgs.)	Water Used-Gals. (Lits.) per 100 lbs. of Ice 90° Air/70° Water		Kilowatts Used per 100 lbs. of ICE 70° Water	Btuh	Voltage Characteristics	No. of Wires	Min. Circuit Amp.	Max. Fuse Size	Shipping Weight lbs. (Kgs.)
						ICE Prod. Use	Cond. Use							
EF800A32S	32 (813)	143 (65)	Air	772 (351)	616 (280)	12.0 (45)	n/a	4.6	7460	115/60/1	3	18.2	20	250 (114)
EF800A38S	38 (965)	213 (97)	Air	772 (351)	616 (280)	12.0 (45)	n/a	4.6	7460	115/60/1	3	18.2	20	260 (118)
EF800A48S	48 (1219)	315 (143)	Air	772 (351)	616 (280)	12.0 (45)	n/a	4.6	7460	115/60/1	3	18.2	20	300 (136)

Please note: air-cooled units require 6" (152 mm) clearance for air intake and exhaust.

Note: EFP800AS includes an 8-pass sealed-in cold plate and stainless steel top and does not include carbonator, pressure regulators, soda lines, faucets and tower.



We reserve the right to make changes in design and construction at any time without obligation.  
2003© ICE-O-Matic Rev Code: 2002A-07/03-55

# ICE o-Matic®

ICE-O-Matic 11100 E. 45th Avenue, Denver, CO 80239  
Tel. 303 371-3737 Fax. 303 371-6296 www.iceomatic.com